





## Video Wall Stand and Accessories

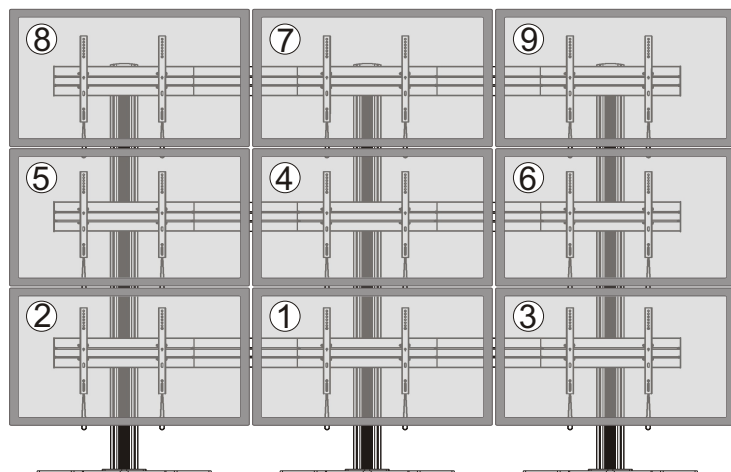


**Note:** The displays are installed by the numerical order given.

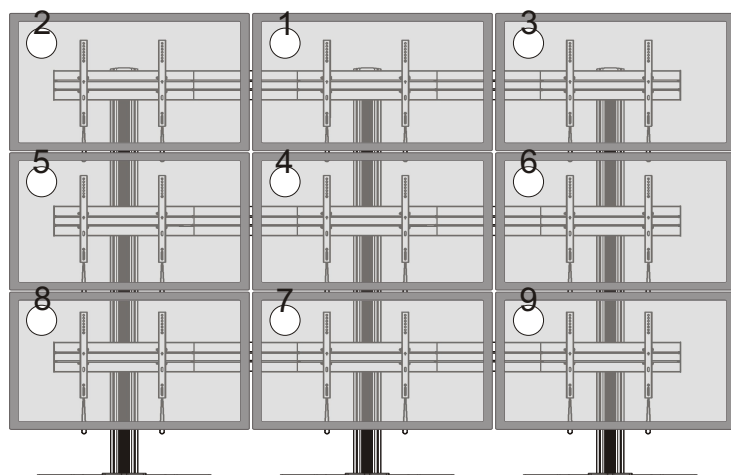


**Note:** The angle of displays are adjusted by the numerical order given.

### Maintenance

- Check that the bracket is secure and safe to use at regular intervals(at least every three months).
- Please contact your distributor if you have any questions.

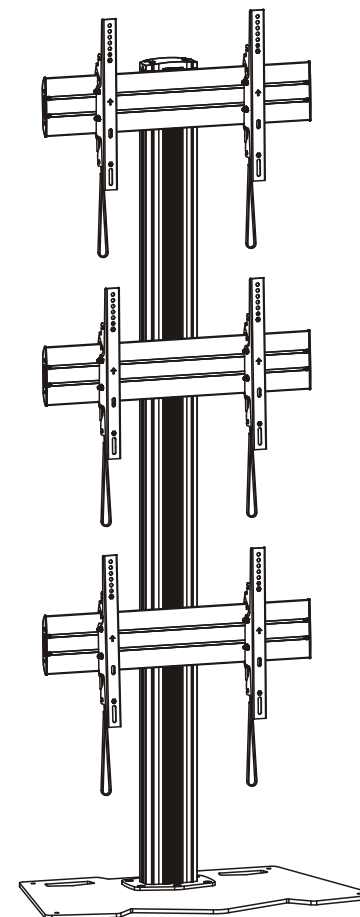

### Optional Accessories



**AS01K**

**Note:** The accessories are not standard equipped. The accessories will be selected according to user requirement.




**CAUTION:** DO NOT EXCEED RATED LISTED WEIGHT. SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!

**AS01346FP**



300x300/400x200  
400x400/600x400
















**NOTE:** Read the entire instruction manual before you start installation and assembly.

## WARNING


- Do not begin the installation until you have read and understood all the instructions and warnings contained in this installation sheet. If you have any questions regarding any of the instructions or warnings, please contact your local distributor.
- This mounting bracket was designed to be installed and utilised **ONLY** as specified in this manual. Improper installation of this product may cause damage or serious injury.
- Always use an assistant or mechanical lifting equipment to safely lift and position the equipment.
- Tighten screws firmly, but do not over tighten. Over tightening can cause damage to the items, This greatly reduces their holding power.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

**IMPORTANT:** Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, telephone your local distributor for a replacement.



### AS01346FP

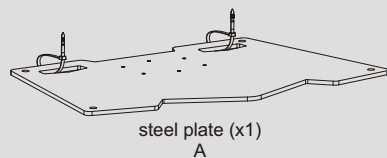


### Package M (x3)



### AS01K (The following accessories are optional)

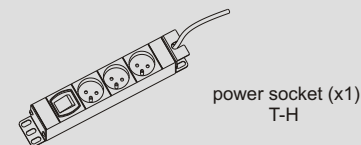


## 1. Installing the Rubber Pads

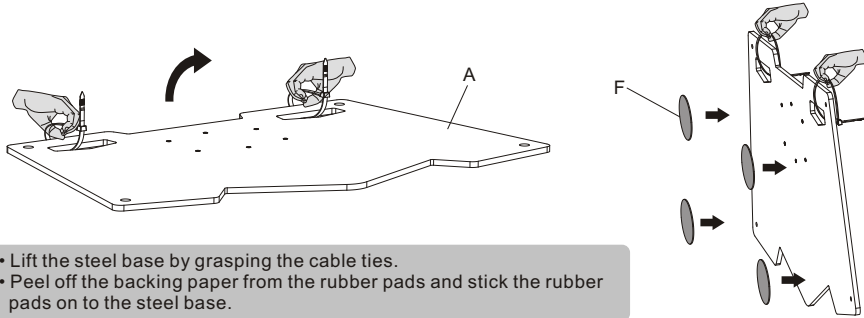


- Lift the steel base by grasping the cable ties.
- Peel off the backing paper from the rubber pads and stick the rubber pads on to the steel base.

## 2. For the model AS01K installation (Assembly based on the accessories selected by user.)

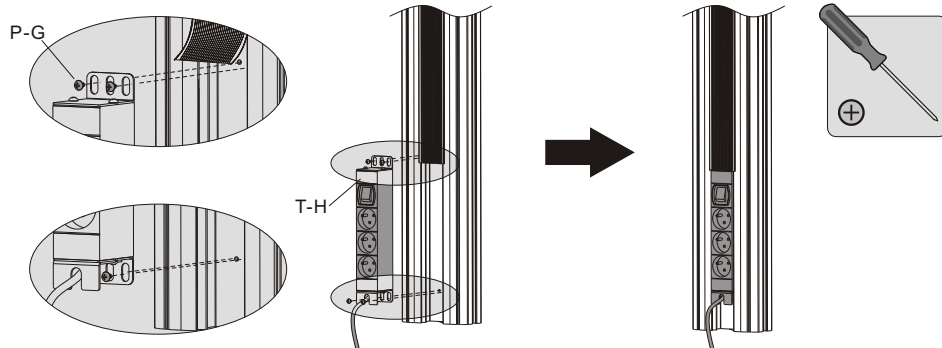


Attach the power socket to the back of column using the appropriate screws. Tighten all screws with a phillips screwdriver.


## 3a. For Concrete Floor Mounting

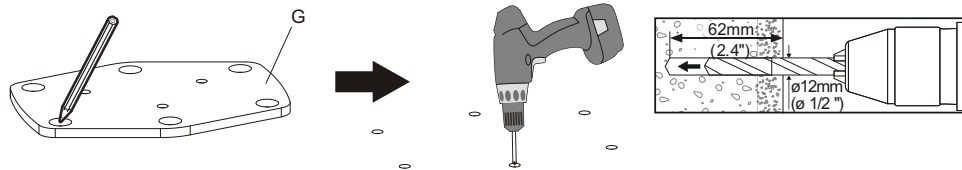

Mark the exact location of mounting holes and pre-drill these mounting holes with a 12mm drilling bit to at least 62mm in depth. Remove the dust in the holes.

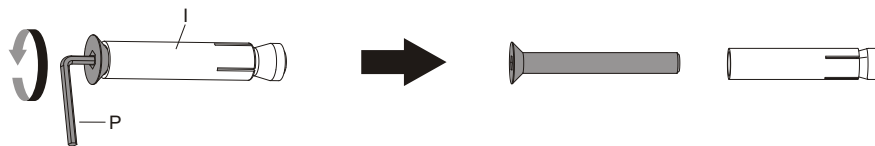


First tighten the iron expansion bolts with an Allen key, and then loosen the iron expansion bolts in order to separate the bolts and the expansion tubes.

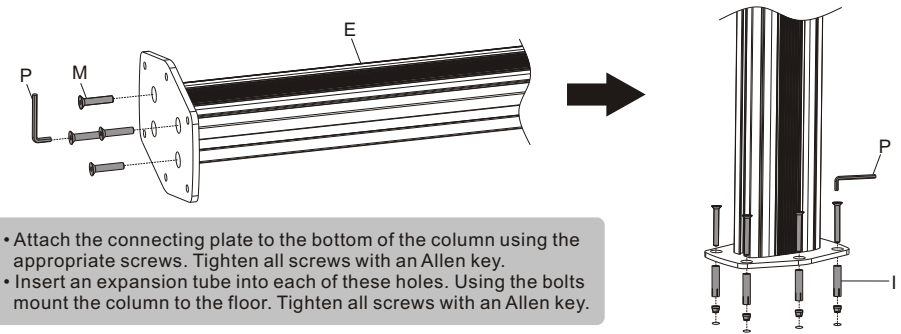


- Attach the connecting plate to the bottom of the column using the appropriate screws. Tighten all screws with an Allen key.
- Insert an expansion tube into each of these holes. Using the bolts mount the column to the floor. Tighten all screws with an Allen key.

## 3b. For the Floor Stand Mounting

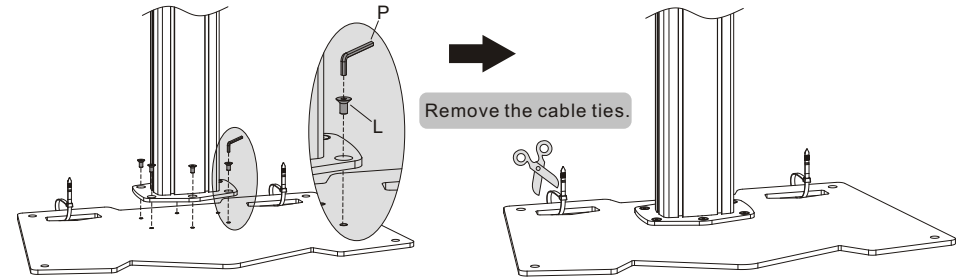


Attach the column to the steel base using the appropriate screws. Tighten all screws with an Allen key.

## 4. Installing the Universal Plates

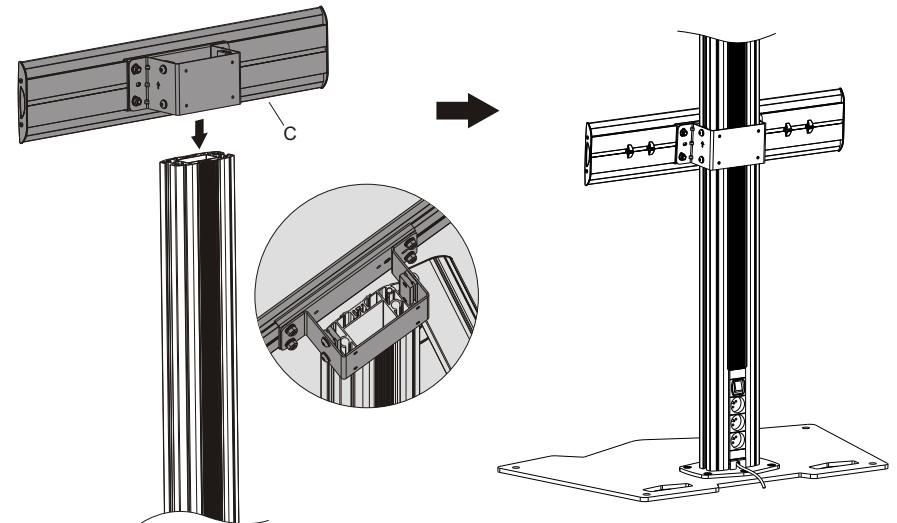


Insert the universal plates to the column along the column rails respectively.  
**NOTE:** With the arrow pointing upward.


## 5. Installing the Top Cover

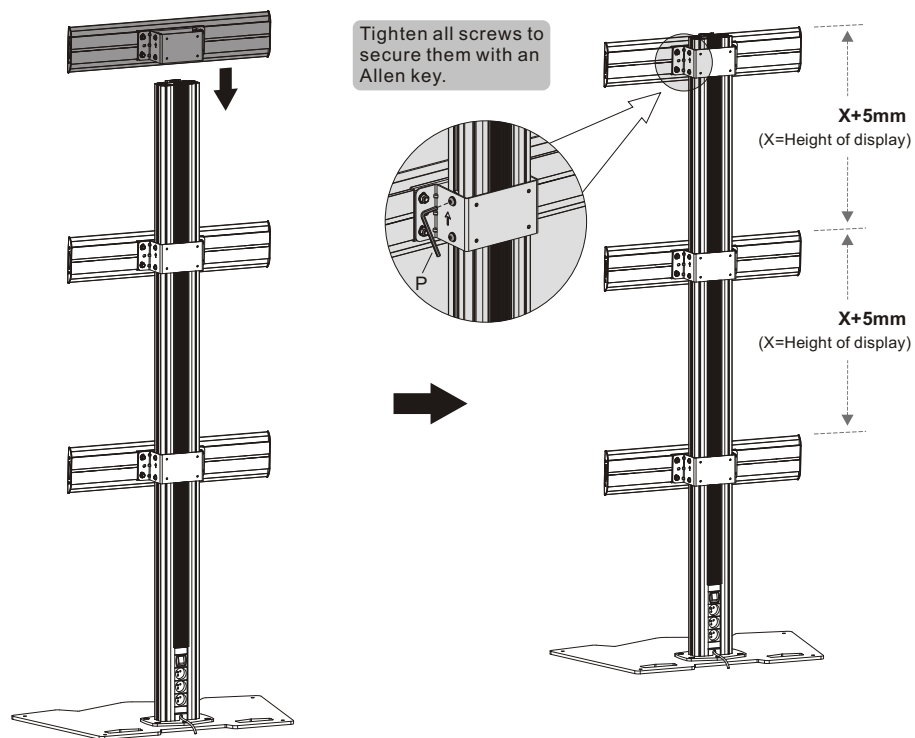




## 6. Installing the Adapter Brackets

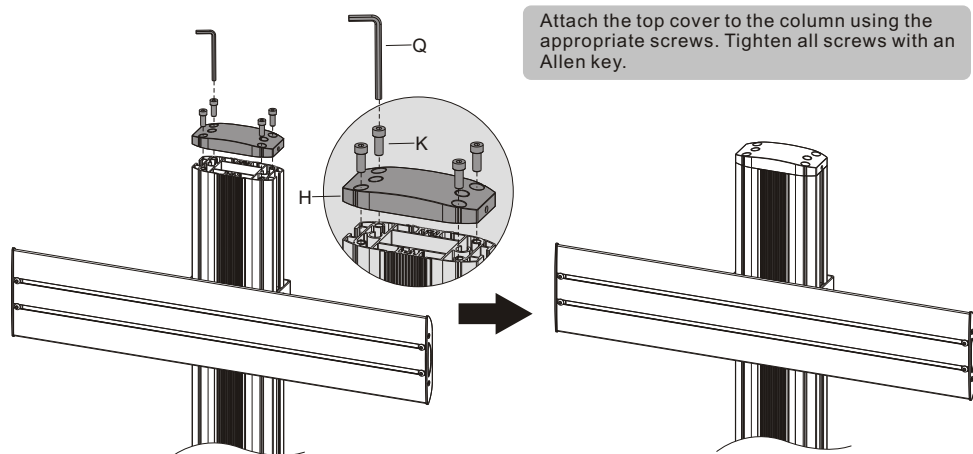

## 6. Installing the Adapter Brackets

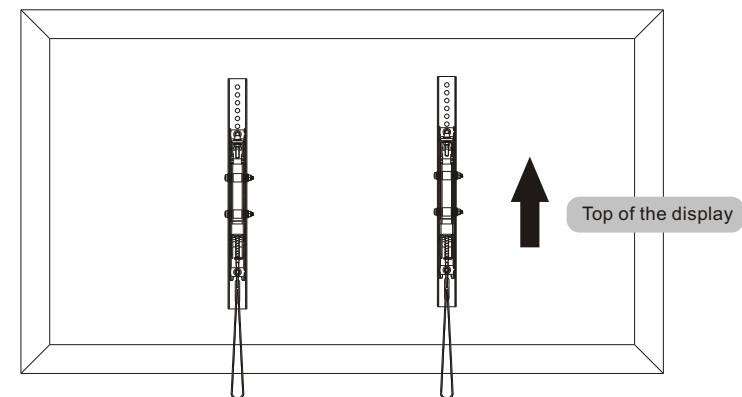


### 6-1 For Flat Back Screens

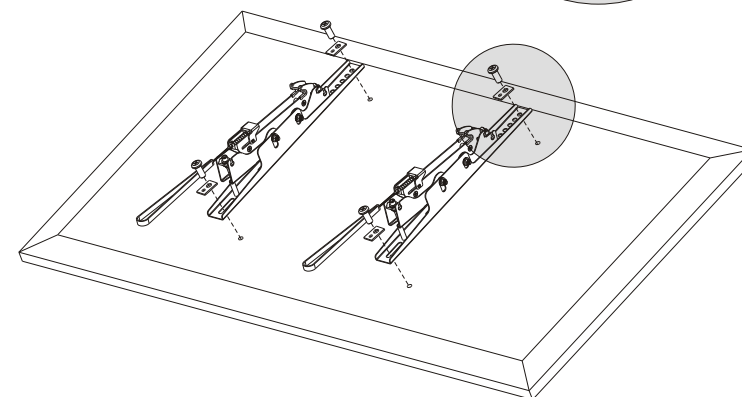



## 6-2 For Recessed Back Screens or to Access A/V Inputs

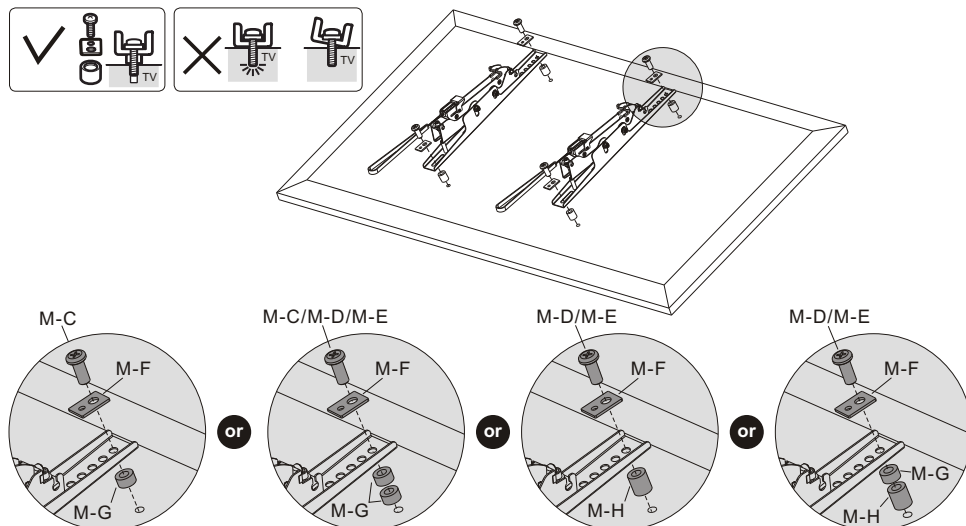


**Note:** Choose the appropriate screws, washers and spacers (if necessary) according to the type of screens.

- Position the adapter brackets as close as possible to the center of the displays.
- Screw the adapter brackets onto the displays.

**⚠ Tighten all screws but do not over tighten.**


## 7. Hanging the Displays onto the Universal Plates

**Note:** The displays are installed to the universal plates from the bottom up.

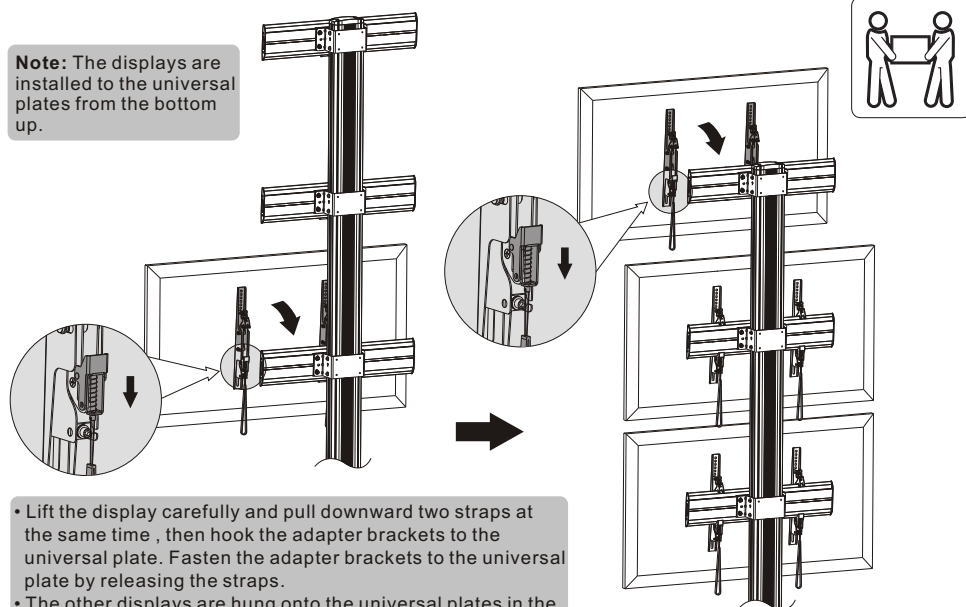


- Lift the display carefully and pull downward two straps at the same time, then hook the adapter brackets to the universal plate. Fasten the adapter brackets to the universal plate by releasing the straps.
- The other displays are hung onto the universal plates in the same way

## 8. Micro-Adjustment

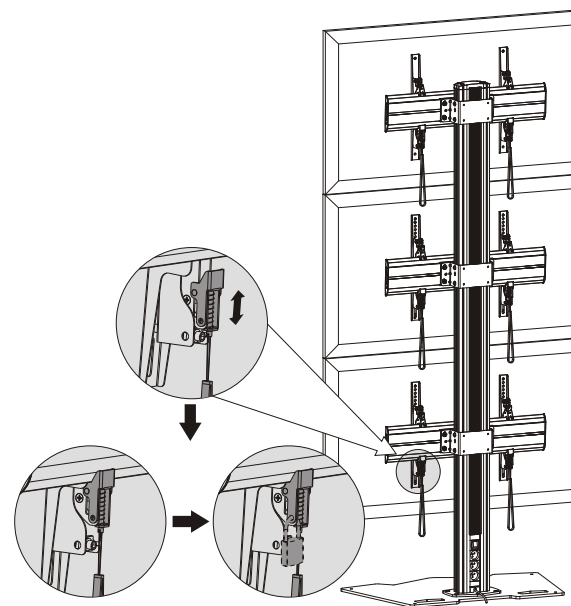


Use the padlocks to prevent the displays from being stolen (The padlocks are not included).

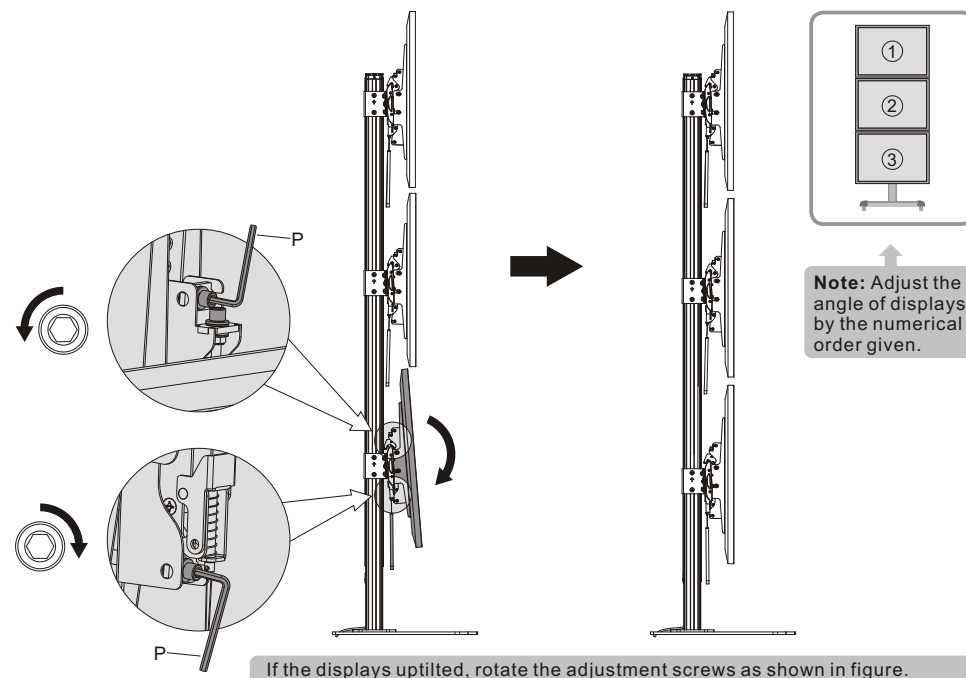


**Note:** Adjust the angle of displays by the numerical order given.

If the displays uptilted, rotate the adjustment screws as shown in figure.

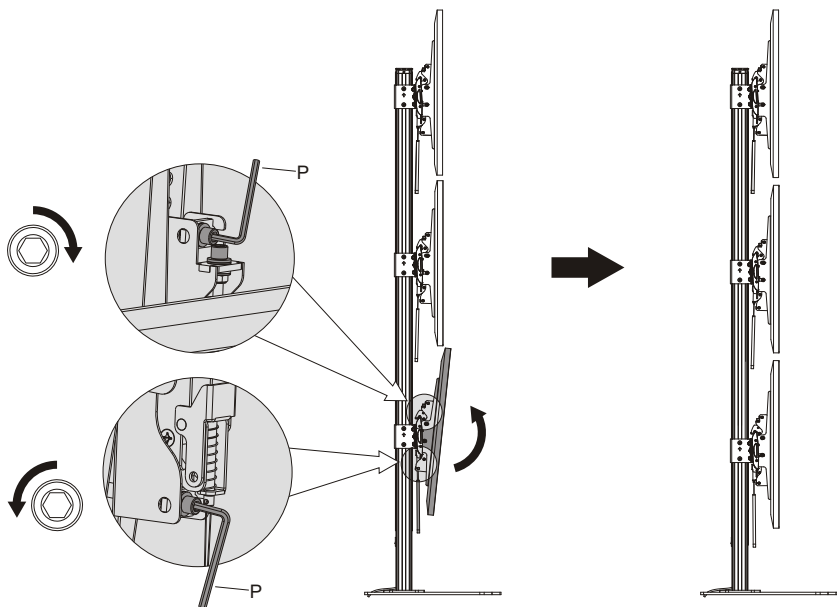


If the displays tilted down, rotate the adjustment screws as shown in figure.

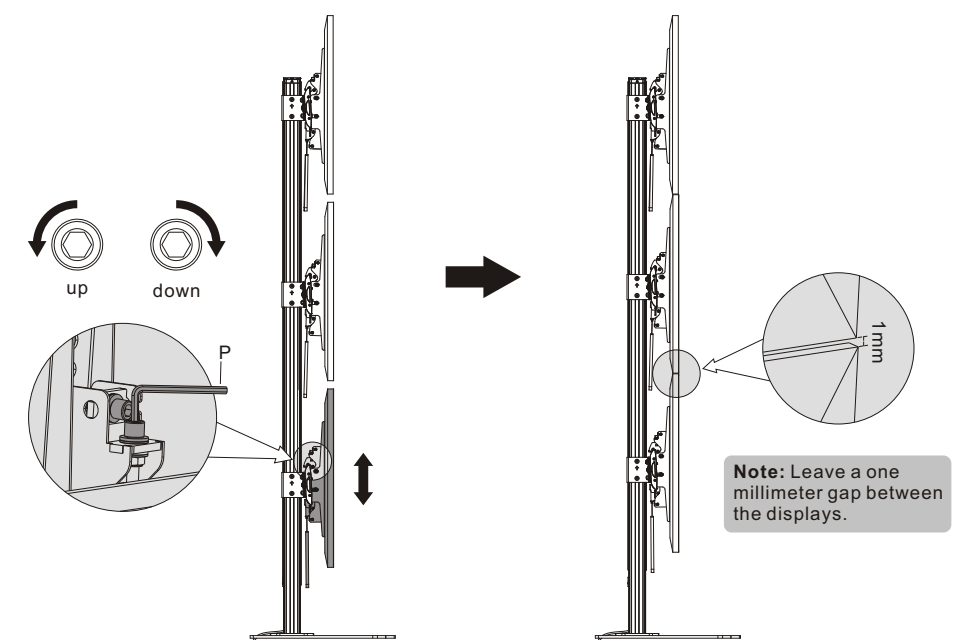


Rotate the adjustment screws as shown in figure to make a one millimeter gap left between the displays.

## 9. Cable Management

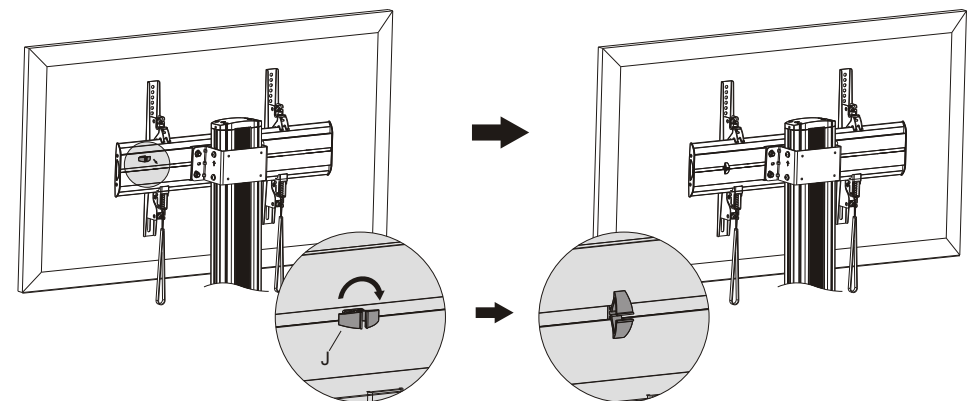


Insert the cable clamps horizontally into the plate slots, then turn the cable clamps to the vertical to secure them.


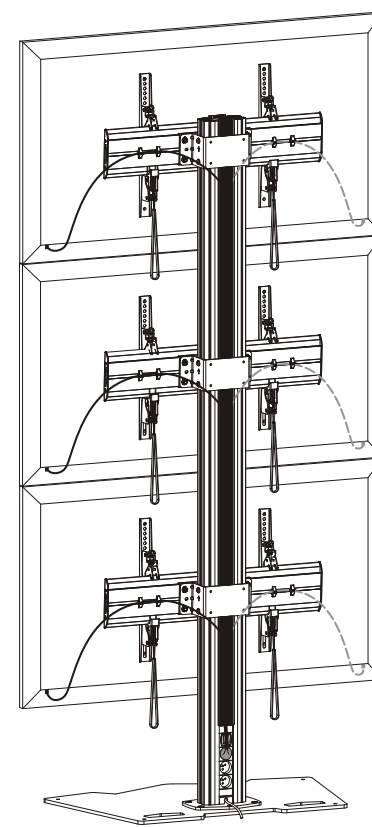


Run the cables through the cable clamps and the rubber strip.


## 10. Adjustment




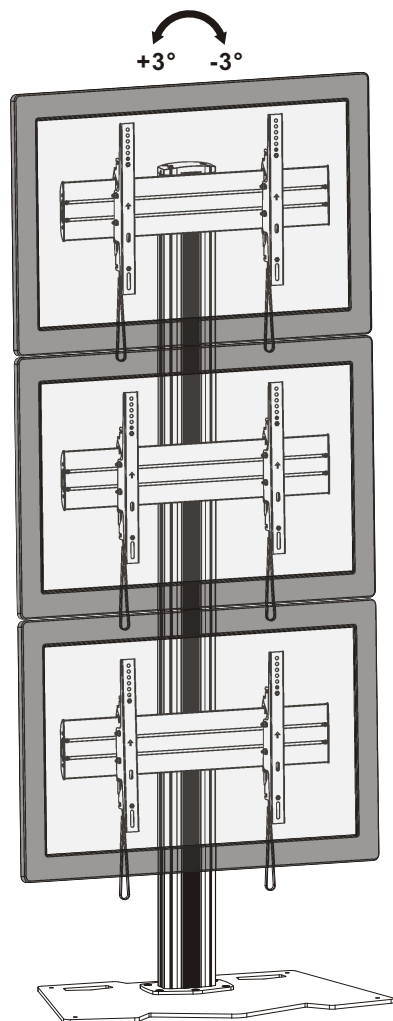


## 11. Multi-screen Combination Solution

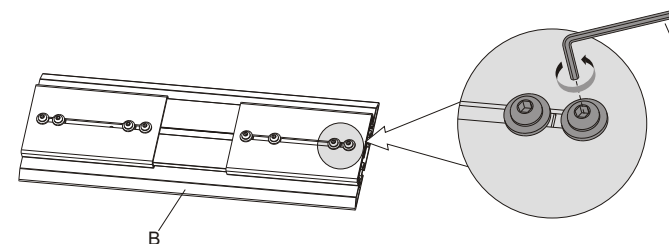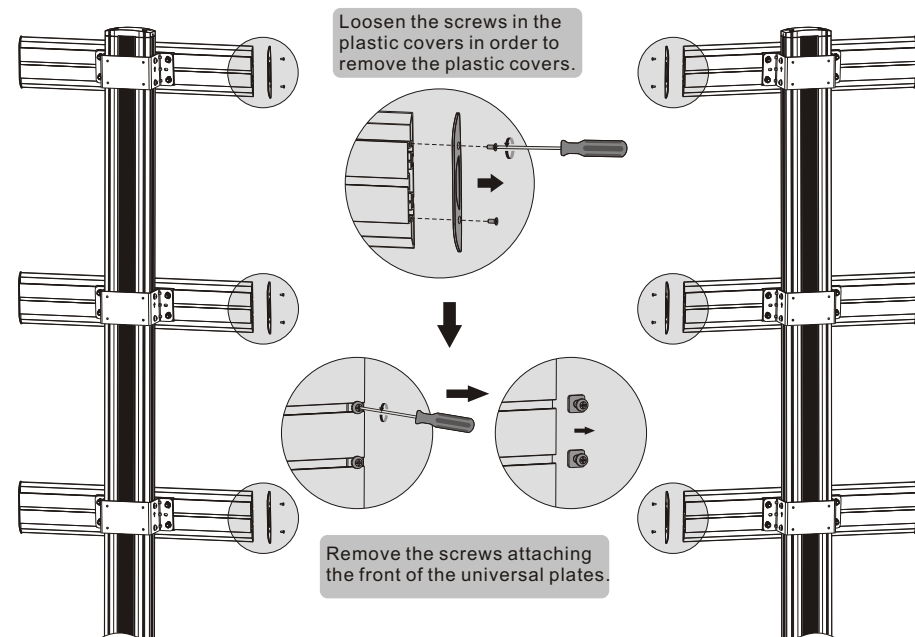


Loosen the screws in the connecting fittings in order to slide the connecting attachments to both sides of the connecting fittings. Then tighten all screws to secure.

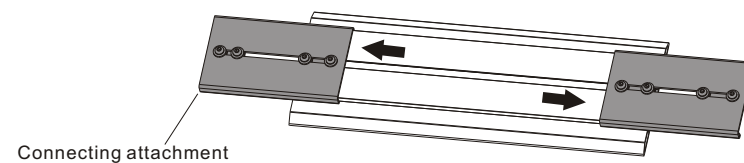

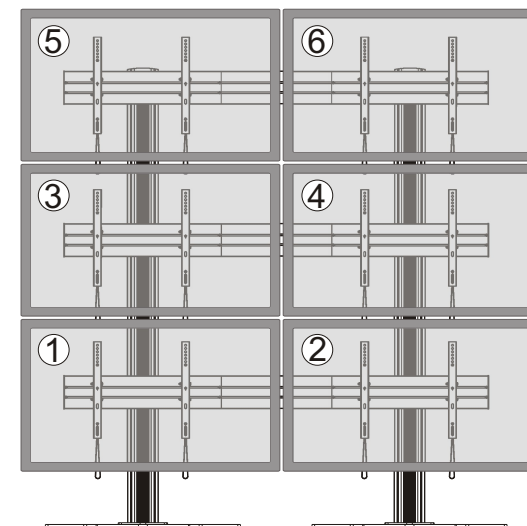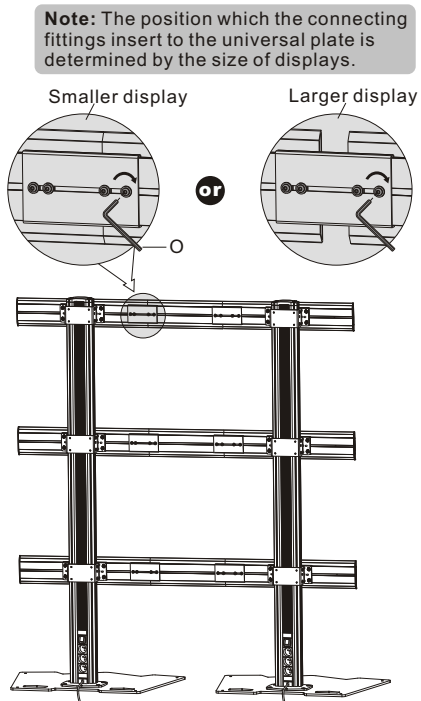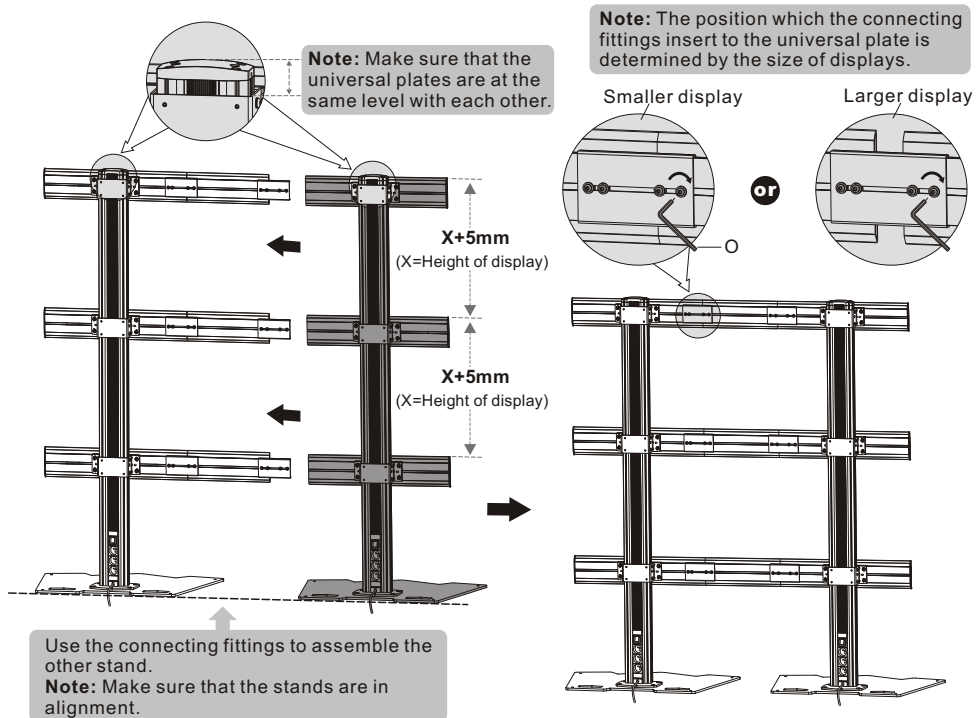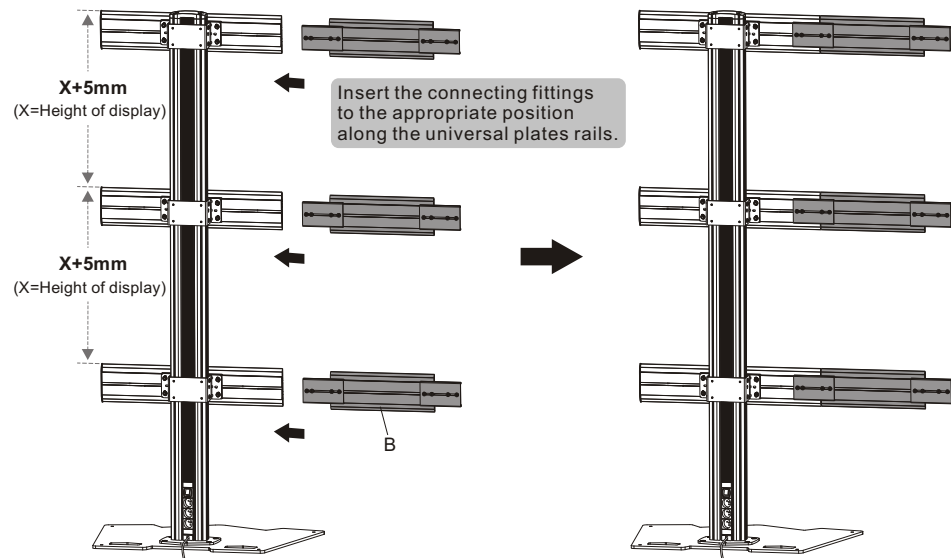

**Note:** The displays are installed by the numerical order given.

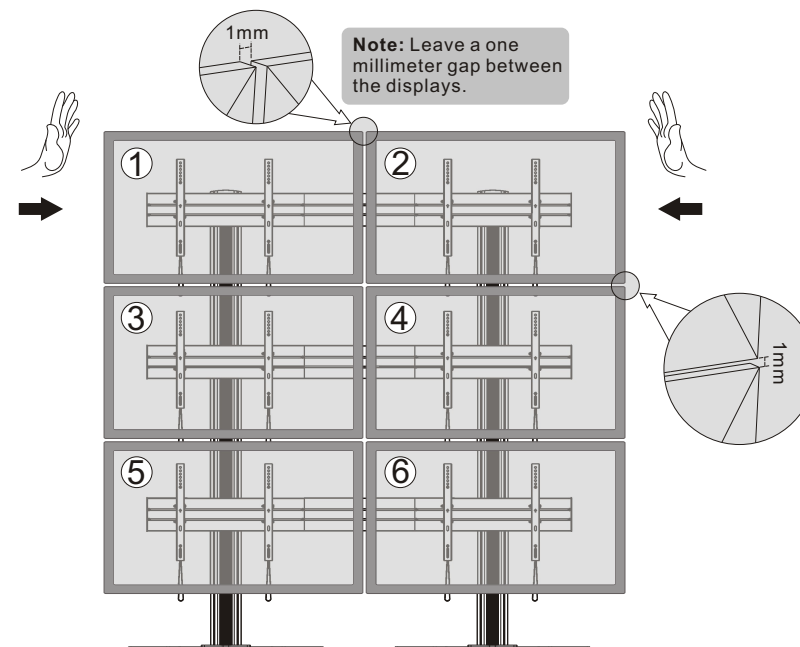

**Note:** The angle of displays are adjusted by the numerical order given.